


## **AG360/WB      AG360 WALL / WINDOW MOUNT BRACKET**

### **AG360 Series T-Bar Antenna and Wall / Glass mount Bracket** **(Please refer to the AG360 Datasheet for performance details)**

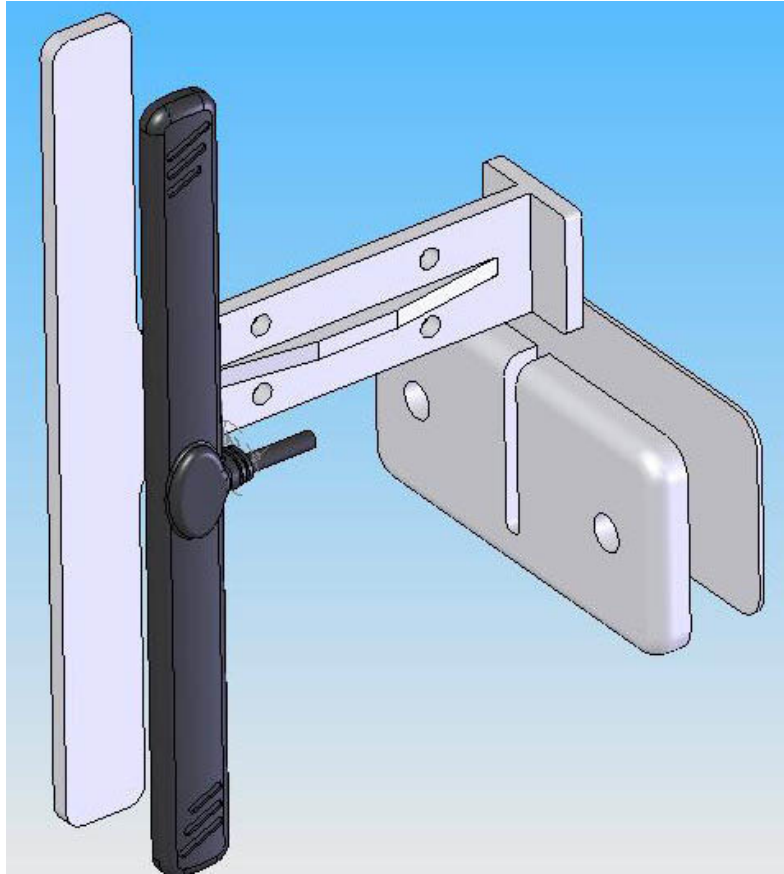

#### **Kit Contents**

1. 1x Plastic 'T' Moulding with AG360 Antenna fitted
2. 1x Plastic mounting flange
3. 2x 2.5mm x 100mm cable ties - fitted
4. 1x Surface cleaning sachets (alcohol wipe)
5. 2x Wall plugs and screws (for Wall Mounting)
6. 1x Double sided adhesive pad (for Window Mounting)
7. 1x Mounting instructions

#### **Physical Data**

Material:	Glass reinforced Nylon - Bracket PVC (Type T12/TM2) - AG360 Antenna
Gross Dimensions:	135mm x 90mm x 70mm
Mounting:	Wall Mount Bracket or Window Adhesive Mount
Operating Temp:	-40 °C to +85 °C

The above data is to be used as baseline information only. For a more detailed specification, application support or application approval samples, please contact our technical support help desk on +44(0) 2392 327 020. We reserve the right to modify the specifications without prior notice.


## **AG360 – GSM ANTENNA**

### **Waterproof / Flexible Quad Band Dipole Antenna** **Vertical Polarisation**



Frequency: GSM: 824 – 896MHz / 900MHz USA  
PCN: 1710 – 1880MHz  
DCS: 1850MHz – 1990MHz  
UMTS: 2.1GHz

Gain: 2.0dBi  
VSWR: Less than 2:1 in all bands  
Impedance: 50Ω

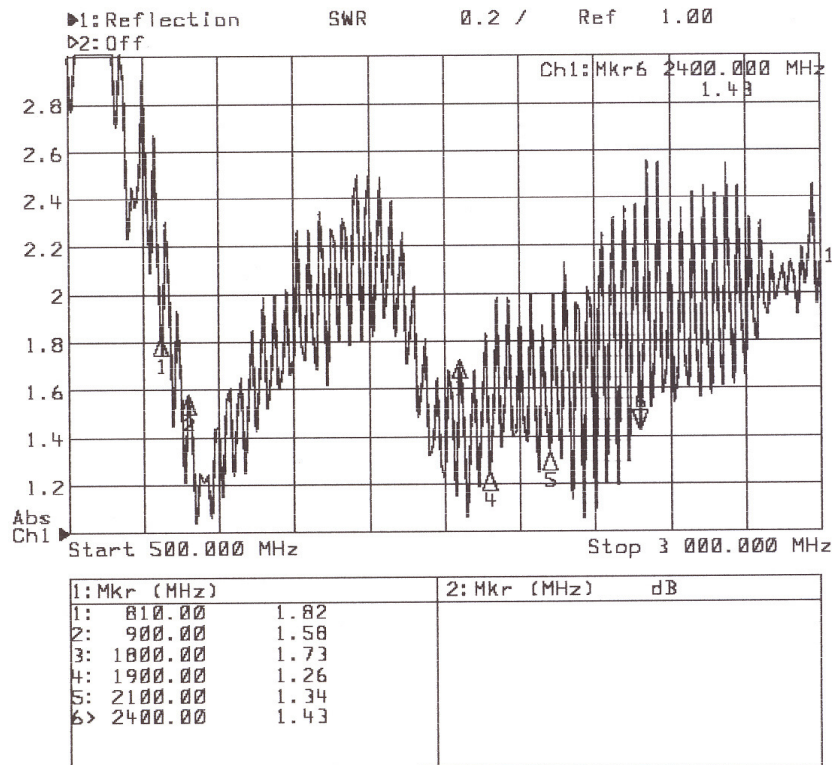

### **Physical Data**

Gross Dimensions: 131mm x 12mm x 4mm Black PVC (Type T12/TM2)  
Plastic.  
Mounting: Double-sided adhesive tape  
Water Resistance: Meets IP56  
Operating Temp: -40 °C to +85 °C  
Cable: RG174 – Specified length (-0mm, +100mm)  
Connectors: Nickel-plated brass crimp type. Specified type

The above data is to be used as baseline information only. For a more detailed specification, application support or application approval samples, please contact our technical support help desk on +44(0) 2392 327 020. We reserve the right to modify the specifications without prior notice.